
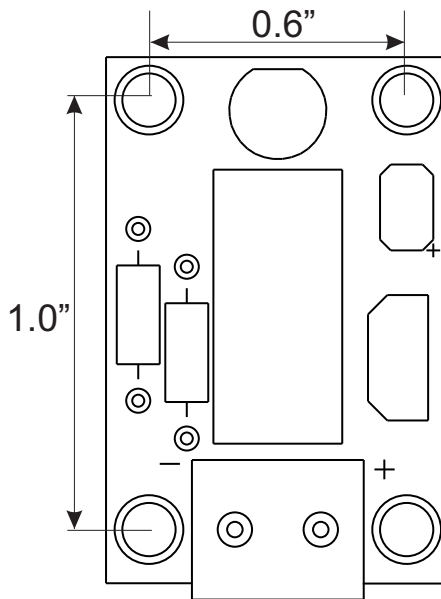



The IR Indicator illuminates the LED when a modulated infrared signal is detected. The LED will illuminate as long as the signal is present. Tamiya, Henlong, VS Tank and Forces of Valor battle systems will be detected.

A 9-12 volt DC voltage is required to power the board. Four mounting holes are provided. Originally designed to have several mounted on a board to display the beam spread these can be used individually as infrared detectors.

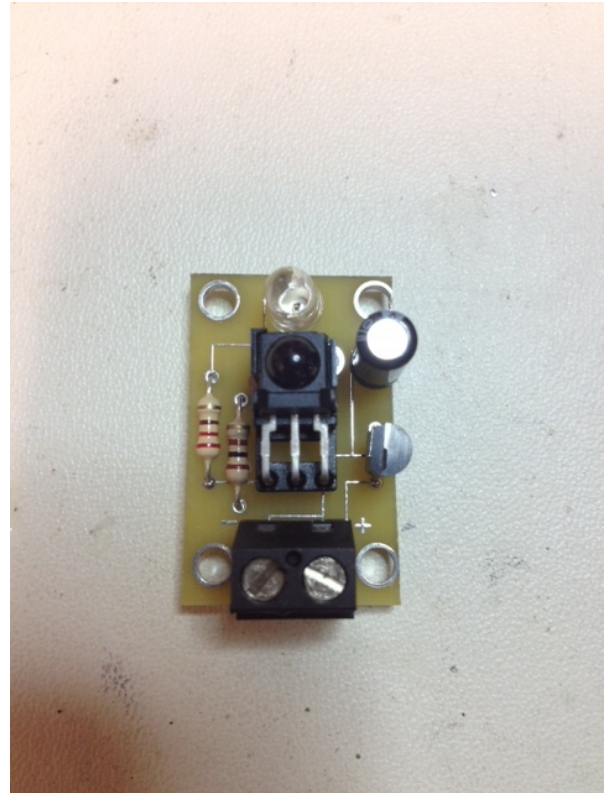

Negative  Positive 